


How can I connect my Creative Lab® "Inspire 6.1 6600" speaker system to my Hercules soundcard? I can't hear the rear center channel.

The Creative® Inspire 6.1 6600 is designed primarily for use with the Audigy 2 sound card, which uses the same 3.5mm 4-pole minijack to connect the Center/Rear center & Subwoofer speakers.

The cable provided with the speaker system can be connected to other manufacturer soundcard, but prevents the use of a discrete rear center channel. Using the "Upmix" function can however be used to simulate this channel.

In order to use this system with your Hercules soundcard AND get the benefit of the rear center channel, you will require the use of multiple audio adapters:

1- 3.5mm 4-pole miniplug-to-3x RCA

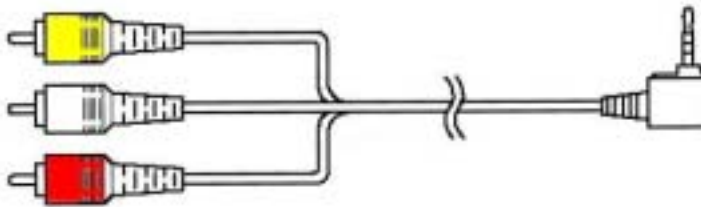

This type of cables is generally used by portable DVD players or digital cameras, and might be hard to find in regular electronic stores. Part's can however be purchased separately to make your own.

One manufacturer providing this type of cable is Pioneer®. The cable can be ordered online or through their retailers (worldwide).


Part number: VDE 1058

<http://parts.pioneerelectronics.com/>

2- Female RCA to Mono 1/8" male minijack



3- Female RCA to Male stereo 1/8" minijack

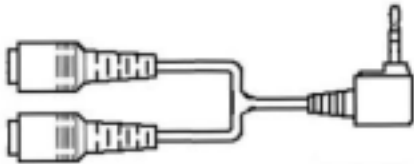

How to connect your system to your soundcard:

SOUNDCARD OUTPUT

SPEAKER INPUTS

