


## DJ Console Rmx – OS X Audio Firmware Update Procedure

1) Download the latest package from the web: [ts.hercules.com](http://ts.hercules.com)

2) Install the package. When asked to connect your **DJ Console Rmx**, just let the timer go (**do NOT plug in the device**) until it reaches the end and completes the installation process

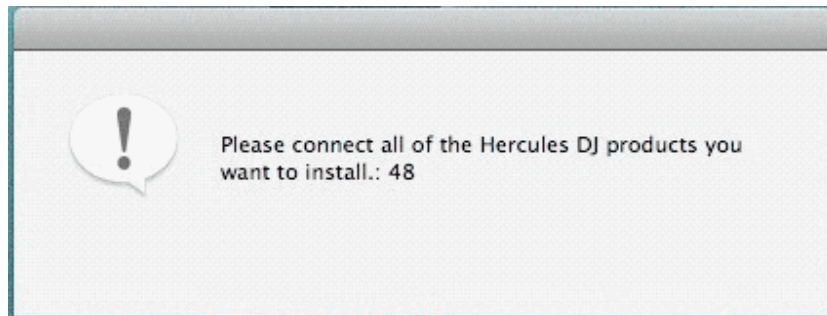

3) Launch the manual updater


**Applications > Hercules > DJ Series > Updater > Manual\_update**



4) Press and hold the **MIC On/Off** button on the console




Plug in the device, while **still holding** the MIC On/Off button

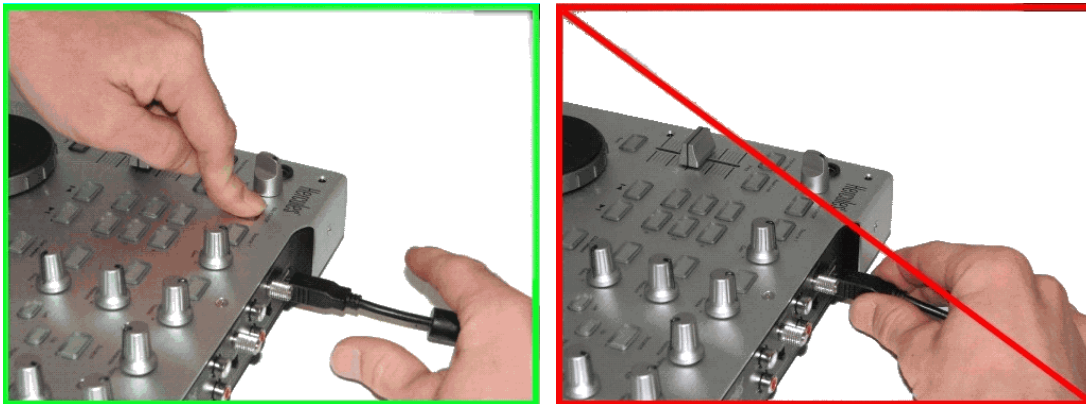

5) Wait until the manual updater sees the device and is refreshed

a) If the updater sees the device, it should say **boot** in the **Current** column

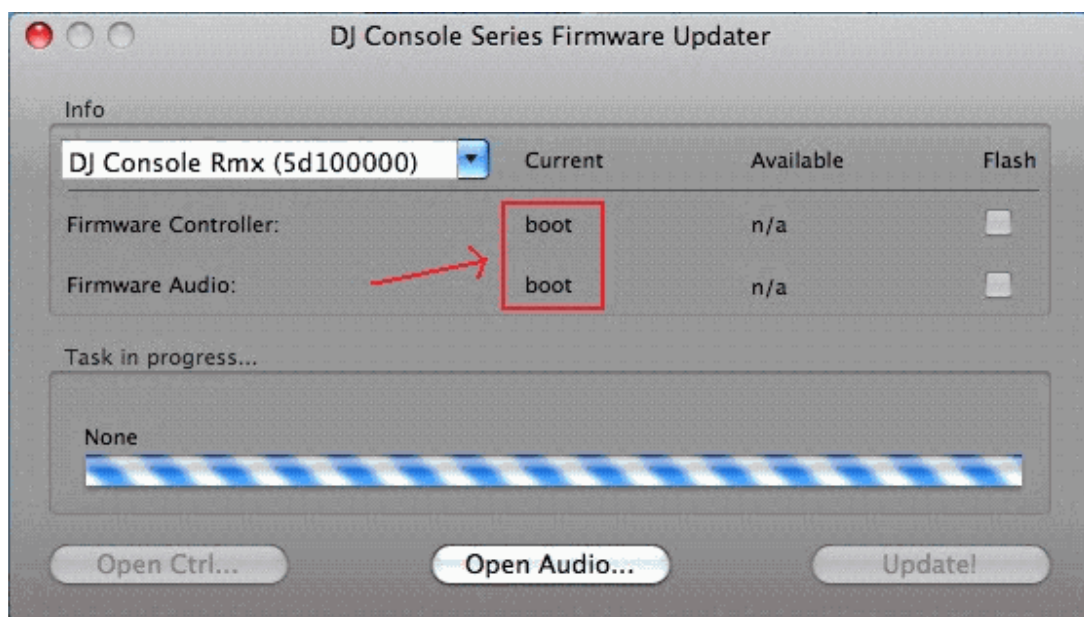


If this correct, proceed to [step 6](#)




b) If the **Current** column does not show **boot** OR the device is still not detected, unplug and re-plug again following the same procedure, making sure **to press and hold** the **MIC On/Off** button before plugging in the device, and still maintaining the hold once connected

6) Click the **Open Audio** button, then browse for the RMX TUSB (RMX\_TSUB.dja) firmware and click **Open**

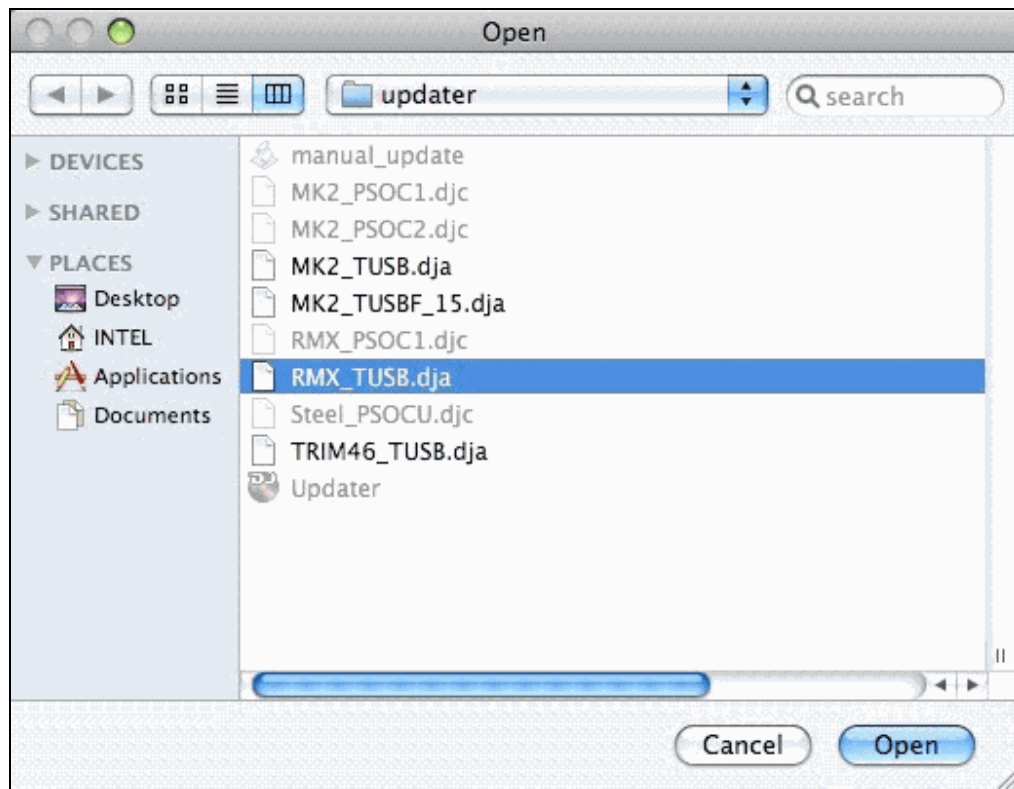

7) Check the **Flash** box and press **Update!** to apply the new firmware to the device

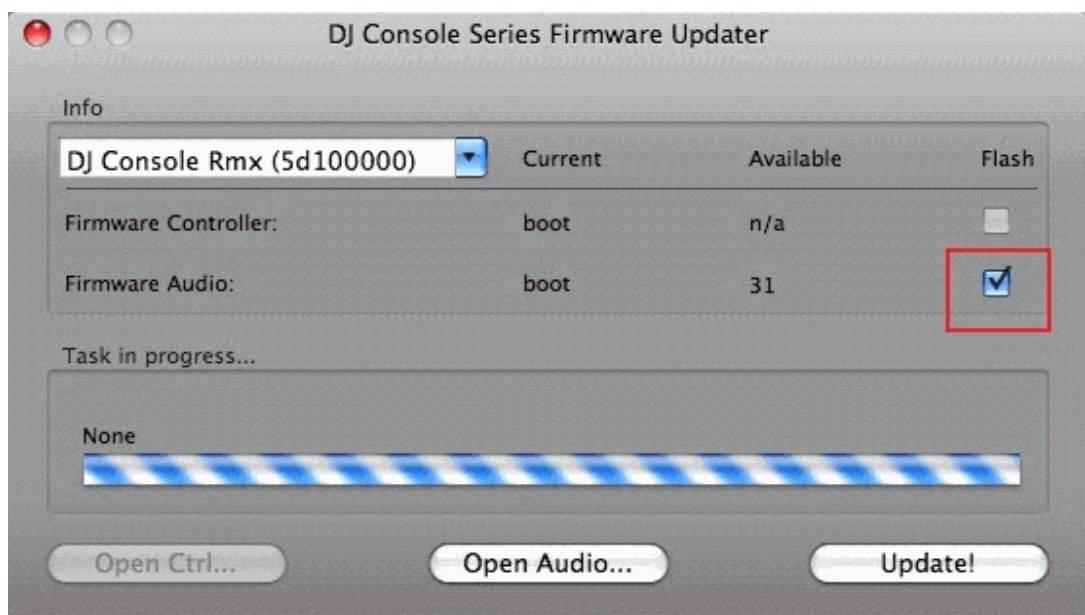

**THE CONSOLE MUST NOT BE UNPLUGGED** until the manual updater confirms completion and advises to do so



When prompted by the updater, unplug the device

8) Plug in the console back to the USB port

9) At this moment the console should be correctly recognized and installed

You can also confirm that the Rmx is correctly installed by verifying the **Rmx Control Panel**.

**> If however the console doesn't appear to have been updated correctly, then start the procedure again from the beginning**